


**QUICK  
REFERENCE  
GUIDE**

- Solid Bushings ➤ Solid Rollers ➤ High Grade Alloy Steel
- ISO R606 Standard ➤ 10' Lengths Standard
- Stainless Steel See Page 12 ➤ Attachments Available

HKK British Standard chain is manufactured to the same high quality specifications as our ANSI chain. Solid bushings and solid rollers dramatically increase chain life. Manufactured in accordance with ISO R606, HKK British standard chains are compatible with British standard B.S. 228 and German standard DIN 8187. Chains are supplied in 10-foot lengths. Attachment chains and stainless steel chains are available.

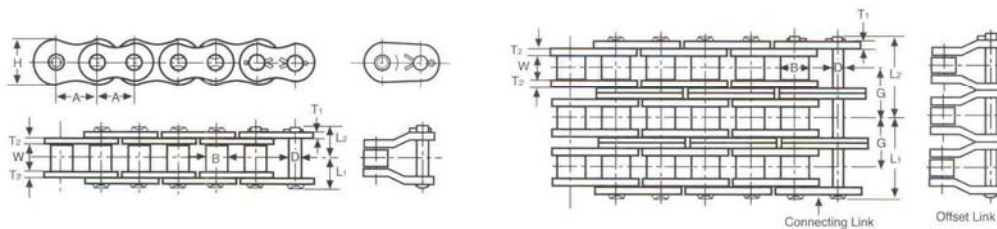

HKK British Chain No.	Pitch A	Roller		Pin Dia. D	Plate				Overall Width		Transverse Pitch G	Average Ultimate Strength (lbs)	Avg. Weight Per Foot (lbs) Riveted
		Dia. B	Width W		Height H	P/L Thickness T1	R/L Thickness T2	L1	L2				
** HKK 04B	0.236	0.517	0.110	0.073	0.197	0.024	0.024	0.163	0.128	—	770	0.06	
** HKK 05B	0.315	0.197	0.118	0.091	0.280	0.030	0.030	0.185	0.150	—	1,100	0.12	
HKK 06B	3/8	0.250	0.225	0.129	0.457	0.039	0.049	0.240	0.276	0.403	4,100	0.29	
HKK 06B-2								0.449	0.480				
HKK 06B-3								0.650	0.677				
HKK 08B	1/2	0.335	0.305	0.175	0.457	0.060	0.060	0.329	0.363	0.548	4,300	0.41	
HKK 08B-2								0.602	0.638				
HKK 08B-3								0.878	0.909				
HKK 10B	5/8	0.400	0.380	0.200	0.571	0.065	0.065	0.374	0.422	0.653	6,000	0.60	
HKK 10B-2								0.700	0.752				
HKK 10B-3								1.030	1.091				
HKK 12B	3/4	0.475	0.460	0.225	0.626	0.070	0.070	0.414	0.491	0.766	7,200	0.77	
HKK 12B-2								0.819	0.878				
HKK 12B-3								1.201	1.256				
HKK 16B	1	0.625	0.670	0.325	0.792	0.122	0.154	0.691	0.805	1.255	17,500	1.74	
HKK 16B-2								1.323	1.437				
HKK 16B-3								1.957	2.071				
HKK 20B	1-1/4	0.750	0.770	0.400	1.024	0.138	0.178	0.791	0.922	1.435	24,400	2.53	
HKK 20B-2								1.512	1.657				
HKK 20B-3								2.232	2.390				
HKK 24B	1-1/2	1.000	1.000	0.576	1.315	0.193	0.233	1.050	1.222	1.904	41,100	4.90	
HKK 24B-2								2.004	2.189				
HKK 24B-3								2.957	3.142				
HKK 28B	1-3/4	1.100	1.220	0.625	1.440	0.250	0.291	1.282	1.525	2.345	54,000	6.22	
HKK 28B-2								2.457	2.772				
HKK 28B-3								3.630	3.953				
HKK 32B	2	1.150	1.220	0.701	1.642	0.250	0.272	1.284	1.550	2.305	62,500	6.68	
HKK 32B-2								2.441	2.776				
HKK 32B-3								3.594	3.941				

\*\* Split Bushing Chains

Dimensions in inches & pounds