



**QUICK REFERENCE GUIDE**

- Solid Roller ➤ Solid Bushing ➤ Operates On Standard Sprockets
- Cotter Connecting Links

HKK Side Bow roller chain consists of standard solid roller / solid bushing roller links. Specially designed pin links allow increased clearance between pins and bushings and between the roller link and pin link plates. This feature gives the chain freedom to slightly twist or curve on a horizontal plane.





HKK Side Bow Chain No.	Pitch A	Roller		Pin		Plate		Overall Width		Min. Curve Radius	Maximum Allowable Load (lbs)	Average Ultimate Strength (lbs)	Avg. Weight Per Foot (lbs) Riveted
		B	W	D	H	T	L1	L2					
HKK 40-SB	1/2	0.312	.312	0.141	0.457	0.060	0.335	0.401	13.780	400	3,510	0.41	
HKK 50-SB	5/8	0.400	.375	0.175	0.571	0.080	0.407	0.483	15.748	700	5,460	0.68	
HKK 60-SB	3/4	0.469	0.500	0.200	0.689	0.094	0.512	0.583	19.685	950	7,300	0.94	
HKK 80-SB	1	0.625	0.625	0.281	0.921	0.125	0.654	0.736	23.622	1,700	14,000	1.66	

Dimensions in inches & pounds

**QUICK REFERENCE GUIDE**

- Solid Hollow Pin Bushing ➤ Perfectly Cylindrical Inside Bushing Diameter ➤ Operates On Standard Sprockets

HKK Hollow Pin chains are constructed with cold-forged solid bushings. This process assures the inside diameter of the bushing is completely cylindrical all the way through. This unique hollow pin feature allows easy insertion of cross rods without damaging the chain or rods. Hollow Pin chain operates on standard sprockets and standard double pitch sprockets.

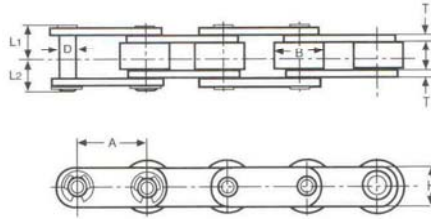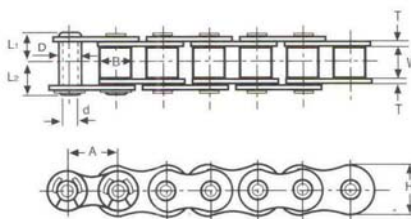

HKK Hollow Pin Chain No.	Pitch A	Roller		Pin		Plate		Overall Width		Maximum Allowable Load (lbs)	Average Ultimate Strength (lbs)	Avg. Weight Per Foot (lbs)
		B	W	Outside Dia. D	Inside Dia. d	Height H	Thickness T	L1	L2			
HKK 40-HP	1/2	0.312	0.312	0.222	0.158	0.472	0.060	0.327	0.362	400	3,000	0.39
HKK 50-HP	5/8	0.400	0.375	0.280	0.202	0.591	0.080	0.404	0.453	700	4,400	0.65
HKK 60-HP	3/4	0.469	0.500	0.327	0.238	0.718	0.094	0.508	0.555	950	7,500	0.98
HKK 80-HP	1	0.625	0.625	0.446	0.318	0.949	0.125	0.638	0.758	1,700	11,400	1.66
<b>Conveyor Type</b>												
HKK C2040-HP	1	0.312	0.312	0.222	0.158	0.472	0.060	0.327	0.362	400	3,000	0.31
HKK C2050-HP	1-1/4	0.400	0.375	0.280	0.202	0.591	0.080	0.404	0.453	700	4,400	0.51
HKK C2060-HP	1-1/2	0.469	0.500	0.327	0.238	0.670	0.094	0.508	0.555	950	7,500	0.75
HKK C2080-HP	2	0.625	0.625	0.446	0.318	0.890	0.125	0.638	0.758	1,700	11,400	1.33
<b>Carrier Roller Type</b>												
HKK C2042-HP	1	0.625	0.312	0.222	0.158	0.472	0.060	0.327	0.362	400	3,000	0.54
HKK C2052-HP	1-1/4	0.750	0.375	0.280	0.202	0.591	0.080	0.404	0.453	700	4,400	0.84
HKK C2062-HP	1-1/2	0.875	0.500	0.327	0.238	0.670	0.094	0.508	0.555	950	7,500	1.20
HKK C2082-HP	2	1.125	0.625	0.446	0.318	0.890	0.125	0.638	0.758	1,700	11,400	2.13

Dimensions in inches & pounds